

Approximate MAP Decoding on Tail-Biting Trellises

Madhu A.S.

Department of Computer Science & Automation.

Indian Institute of Science

Bangalore, India.

Email: madhu@csa.iisc.ernet.in

Priti Shankar

Department of Computer Science & Automation.

Indian Institute of Science

Bangalore, India.

Email: priti@csa.iisc.ernet.in

Abstract— We propose two approximate algorithms for MAP decoding on tail-biting trellises. The algorithms work on a subset of nodes of the tail-biting trellis, judiciously selected. We report the results of simulations on an AWGN channel using the approximate algorithms on tail-biting trellises for the (24, 12) Extended Golay Code and a rate $1/2$ convolutional code with memory 6.

I. INTRODUCTION

In this paper we propose a new approximate MAP decoding technique on tail-biting trellises that exploits the subtrellis structure of the tail-biting trellis to compute approximate a posteriori probabilities (APPs) of codeword symbols. Our algorithm is best described as a best-search algorithm, meaning thereby, that the algorithm tries to track those subtrellises which are most likely to contain the transmitted codeword and computes marginals over these only. Our approximate decoder works rather efficiently at higher values of signal to noise ratios. We compare our results with those obtained by the *wrap* version of Anderson-Hladik MAP decoder [2], which we refer to as the AH-decoder. The rest of the paper is organized as follows. Section II gives some background. Section III describes the decoding algorithm. Section IV describes a simple modification to the scheme. Section V presents the results of simulations on an AWGN channel on a 16 state tail-biting trellis for the (24, 12) Extended

Golay code and a 64 state tail-biting trellis for a rate $1/2$, memory 6, convolutional code. Section VI concludes the paper.

II. BACKGROUND

Tail-biting trellises for convolutional codes were introduced in [8] and those for block codes in [3], [4]. For ease of notation we view the tail-biting trellis $T = (V, E, \mathbb{F}_q)$, of depth n , to be defined on a sequential time-axis with $V_0 = V_n$ and all valid paths restricted to those that begin and end at the same state. We call V_0 and V_n respectively the start and final states of T . In [5], [6], [7], [8] it was shown that a tail-biting trellis could be viewed as the superposition of subtrellises obtained from a coset decomposition of the code represented by it with respect to a subgroup. Corresponding to each start state of the tail-biting trellis we define a subcode consisting of all codewords that begin and end at the same state. These subcodes all have identically structured subtrellises (though with different labels), and share states at various time indices. This subtrellis structure is exploited to give an approximate MAP decoding algorithm.

III. APPROXIMATE DECODING ON TAIL-BITING TRELLISES

In order to explain the approximate MAP algorithm we define the weight of a subtrellis T_j conditioned on

the received vector $\mathbf{r}$ as

$$\text{weight}(T_j) = \sum_{\mathbf{c} \in C_j} Pr(\mathbf{c}|\mathbf{r})$$

where C_j is the subcode represented by T_j . The weight of a subtrellis is the a posteriori probability that the transmitted codeword lies in the particular subtrellis. The weight of a subtrellis is also the maximum contribution a subtrellis can make to the decision sums for computing the APP of any digit of the codeword. The basic idea in MAP Approximate Algorithm (MAA) is to start off by obtaining initial estimates to the weights of the subtrellises. The initial estimates are all overestimates. We begin with the best subtrellis with respect to the current estimates and begin a forward pass on that subtrellis. We define our updating function for estimates as we progress along sections of the current trellis such that the overestimates become more and more accurate as we go along, always converging to the exact value at the end. Each time we move from one section to the next, we check the updated estimate against those of other subtrellises and switch to another subtrellis if it appears more likely to be the correct one. Thus the algorithm may switch from one subtrellis to another during the course of execution. However, it is always guaranteed to finish on the most likely subtrellis. The same is done for the backward pass. Now after the two passes are over, there will be subtrellises for which certain sections have been opened only in the forward or backward pass but not both. In the final marginalization phase we ignore these sections of subtrellises which have not been opened by both the passes.

A. Node Objective Functions

Given a one-to-one tail-biting trellis $T = (V, E, \mathbb{F}_q)$ of depth n , we use the following notation. We denote the label of an edge $e \in T$ by $l(e)$. For an edge $e = (u, v) \in T$ we define predecessor and successor operators as $Init(e) = u$ and $Term(e) = v$. By nodes of T we refer to the vertices of T . The start node of a subtrellis T_j is denoted by s_j and the final node by

f_j . The set of all paths in the tail-biting trellis from node u to node v is denoted by $P(u, v)$. Further let $P(U, V) = \cup_{u \in U, v \in V} P(u, v)$ denote the set of paths from nodes in U to nodes in V .

Given a received vector $\mathbf{r}$ we annotate the edges of the tail-biting trellis suitably using the channel information so that the codeword APP gets decomposed along the edges of the codeword path. The weight of an edge is denoted by $w(e)$. We then define the weight of a path as the product of the weights of the edges constituting the path. The weight of a subtrellis T_j , as defined previously, is then the sum of the weights of all paths in T_j .

The approximate algorithm computes a set of node-objective functions on the nodes of the tail-biting trellis. These function definitions are identical to the forward-backward passes defined in [1].

α_T and β_T are functions whose domain is the nodes of the tail-biting trellis T . They are defined recursively as

$$\begin{aligned} \alpha_T(v) &:= \sum_{e: Term(e)=v} \alpha_T(Init(e))w(e) \\ \beta_T(v) &:= \sum_{e: Init(e)=v} \beta_T(Term(e))w(e) \end{aligned} \quad (1)$$

with $\alpha_T(V_0) := \beta_T(V_n) := 1$.

This is just a forward-backward pass on T , initialized according to the boundary conditions.

Also corresponding to each subtrellis T_j we define two functions α_{T_j} and β_{T_j} whose domain is the set of nodes belonging to T_j . α_{T_j} and β_{T_j} at a node u capture the computational effects of exclusive forward and backward passes respectively on T_j at u .

α_{T_j} at a node $u \in T_j$ is defined inductively as

$$\alpha_{T_j}(u) := \sum_{e \in T_j: Term(e)=u} \alpha_{T_j}(Init(e))w(e) \quad (2)$$

with $\alpha_{T_j}(s_j) := 1$.

Similarly β_{T_j} at a node $u \in T_j$ is defined inductively as

$$\beta_{T_j}(u) := \sum_{e \in T_j: Init(e)=u} \beta_{T_j}(Term(e))w(e) \quad (3)$$

with $\beta_{T_j}(f_j) := 1$.

It can be seen that α_{T_j} at a node $u \in T_j$ is the sum of

the weights of all paths in $P(s_j, u)$, while β_{T_j} at u is the sum of the weights of all paths in $P(u, f_j)$. Similarly α_T at a node $u \in T$ gives the sum of the weights of all paths in $P(V_0, u)$ whereas β_T at u gives the sum of the weights of all paths in $P(u, V_n)$.

B. The Approximate MAP Algorithm

We now give an informal description of the MAP Approximate Algorithm (MAA).

MAP-AA

Input: A one-to-one tail-biting trellis $T = (V, E, \mathbb{F}_q)$ of depth n , with edge weights suitably defined using the received vector $\mathbf{r}$ and channel information

Output: A vector of approximations to $Pr(c_i = \sigma | \mathbf{r})$ for $\sigma \in \mathbb{F}_q$ and $i = 1, 2, \dots, n$

1) *Phase 1:* This phase computes the node-objective functions α_T and β_T with respect to the tail-biting trellis T by executing a forward-backward pass on T with boundary conditions as suggested by Recursion 1.

2) *Phase 2:* This phase computes a set of node-objective functions α_{T_j} and β_{T_j} with respect to the subtrellises that share the node. It consists of a forward and a backward pass.

A node can be shared among many subtrellises and will belong to the domain of the functions defined with respect to these subtrellises. MAA computes a subset of these functions either partially or completely.

a) *Forward Pass:* At each step in the forward pass the approximate algorithm first chooses a winning subtrellis T_w . It then computes α_{T_w} for the next section of T_w using Recursion 2. The winning subtrellis is one at which a suitably defined heuristic function, h_f , is maximized. We associate a working index with each subtrellis. The working index of a subtrellis T_j gives the last section of the tail-biting trellis at which the node-objective function α_{T_j} has been computed.

The forward pass works along the following lines. The working indices are initialized to the start section and the boundary conditions of Recursion 2 are enforced.

We start by choosing a winning subtrellis T_w from the set of $|V_0|$ subtrellises defined on T such that h_f is maximized at T_w . The heuristic function at a subtrellis T_j with a working index k is a function of α_{T_j} and β_T at section k in T . We describe the heuristic function in detail later. If the working index of T_w is the final section, we successfully exit from the forward pass. Otherwise we increment the working index to the next section. Using the values of α_{T_w} at the nodes of previous working index of T_w , we then compute α_{T_w} at the nodes of the current working index according to Recursion 2. After computing α_{T_w} for the current working index, we re-evaluate the heuristic function at T_w . We then go back to the process of choosing the winning subtrellis and computing the corresponding node-objective function at the next working index of the winning subtrellis.

The heuristic function at T_j with working index k is defined as

$$h_f(T_j, k) := \sum_{u \in V_k \cap T_j} \alpha_{T_j}(u) \beta_T(u).$$

We now motivate this definition of the heuristic function. Let Π_j^k be the set of paths in $P(V_0, V_n)$ whose first k edges lie in T_j . It can be seen that $h_f(T_j, k)$ is the sum of the weights of paths in Π_j^k . Note that $h_f(T_j, 0) = \beta_T(s_j)$ is the sum of weights of paths in $P(s_j, V_n)$. Now observe that $\Pi_j^{k+1} \subseteq \Pi_j^k$. Since the edge-weights are probabilities and therefore non-negative, this implies that

$$h_f(T_j, k+1) \leq h_f(T_j, k).$$

Also by definition $\Pi_j^n = T_j$ and as a consequence $h_f(T_j, n) = \text{weight}(T_j)$.

It follows that the heuristic for T_j keeps falling after each revision and finally converges to the weight of T_j . Thus at any instant the heuristic for T_j is an over-estimate to the weight of T_j . If a forward pass has been completed on a subtrellis T_j , the approximate algorithm guarantees that a forward pass will be completed on all subtrellises T_k with $\text{weight}(T_k) > \text{weight}(T_j)$.

b) Backward Pass: In the backward pass we compute a set of node-objective functions β_{T_j} with respect to subtrellises T_j as dictated by Recursion 3. The backward pass is similar in spirit to the forward pass except for the definition of the heuristic function and the backward direction of computational flow on the trellis. The computation starts by initializing the working indices of subtrellises to the final section and ends when the working index of the winning subtrellis is the start section.

The heuristic function at T_j with working index k for the backward pass is defined as

$$h_b(T_j, k) := \sum_{u \in V_k \cap T_j} \beta_{T_j}(u) \alpha_T(u).$$

It can be seen that $h_b(T_j, k)$ is the sum of weights of all paths in $P(V_0, V_n)$ whose last $n-k$ edges lie completely in T_j . It follows that all the properties noted for the heuristic function along the forward pass carry over to the heuristic function for the backward pass.

3) *Phase 3:* This phase computes the approximate marginals corresponding to each symbol σ and each position i . We compute the approximate a posteriori probabilities $Pr(c_i = \sigma | \mathbf{r})$ as

$$\sum_{e \in E_i, l(e) = \sigma} w(e) \sum_j \alpha_{T_j}(Init(e)) \beta_{T_j}(Term(e)).$$

The product in the inner-sum is taken over only those node-objective functions which have been computed.

IV. A SIMPLE MODIFICATION

By restricting the Phase 2 of MAA to work with a fixed number of subtrellises say μ , we can reduce the storage requirements of the algorithm at the cost of incurring a further penalty in the accuracy of the APPs computed. In order to decide the μ subtrellises to work with, we evaluate $\min(h_f(T_j, 0), h_b(T_j, n))$ at each subtrellis T_j and choose the first μ subtrellises at which this quantity is the largest.

The rationale behind this choice is that both $h_f(T_j, 0)$ and $h_b(T_j, n)$ are overestimates to the $weight(T_j)$ and the minimum of the two is nearer to the true

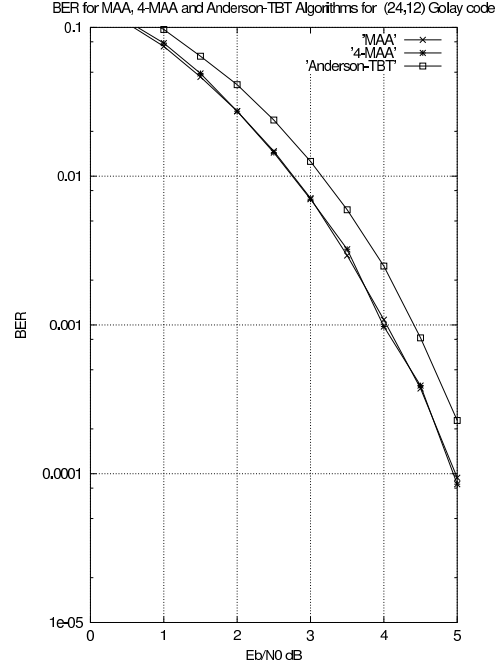


Fig. 1. BER for the MAA, 4-MAA and AH-Decoder (Wrap=10) algorithm for the (24,12) Extended Binary Golay Code

weight of T_j . We call this modified scheme as the μ -MAP Approximate Algorithm (μ -MAA). Surprisingly this scheme gives pretty good results for the codes on which we have run experiments.

V. SIMULATION RESULTS

We have coded the MAA, 4-MAA and AH-Decoder and shown the results of simulations on the minimal 16 state tail-biting trellis [3] for the extended (24,12,8) Golay code and a 64 state tail-biting trellis for a rate 1/2 convolutional codes with memory 6 (equivalent to the (554,744) convolutional code of [2]), with circle size 48. This is the same code experimented on in [2]. The channel model used is an AWGN channel with antipodal signaling. The source bits were assumed to be equally-likely.

For the convolutional code we show the variation of the average number of forward-backward updates with the signal to noise ratio for the MAA and compare it with the number of forward-backward updates required by the AH-Decoder.

We also show the variation of average number of subtrellises explored by the Phase 2 of MAA with signal to

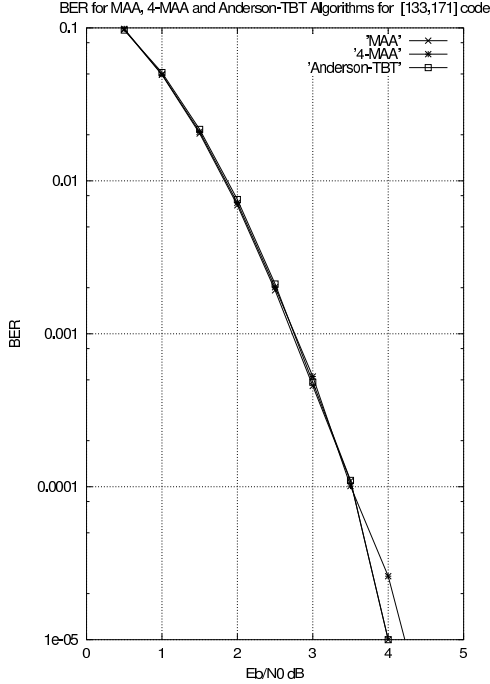


Fig. 2. BER for the MAA, 4-MAA and AH-Decoder (Wrap=40) algorithm for the rate 1/2 (133,171) Convolutional Code with circle length 48

noise ratio. The tail-biting trellis representing the code has 3072 states and 64 subtrellises. Each subtrellis has 2493 states. The result is displayed in Table I. It can be seen that at moderate to high SNR, the Phase 2 of MAA seems to work on only a single subtrellis.

We also display the performance of the MAA, 4-MAA and AH-Decoder in Figures 1 and 2 and find that there is virtually no difference in the bit error rates for the three algorithms for the convolutional code. For the Golay code the MAA and the 4-MAA seem to do slightly better than the AH-Decoder.

VI. CONCLUSION

We have shown that at the expense of some extra space we can obtain approximate algorithms with good performance for MAP decoding on tail-biting trellises. Simulations on tail-biting trellises for the (24,12) Extended Golay code and a rate 1/2, memory 6 convolutional code used in [2] have been carried out and the results on an AWGN channel are reported.

SNR	avg updates by MAA	avg updates by AH-Decoder	avg no: of subtrellises examined by MAA
0.0	91867	22528	7.60
0.5	53737	22528	4.04
1.0	34113	22528	2.16
1.5	25984	22528	1.38
2.0	23087	22528	1.11
2.5	22230	22528	1.02
3.0	22049	22528	1.00
3.5	22014	22528	1.00
4.0	22008	22528	1.00
4.5	22008	22528	1.00
5.0	22008	22528	1.00

TABLE I

RUNTIME STATISTICS FOR THE MAA AND AH-DECODER
(WRAP=40) FOR THE RATE 1/2, MEMORY 6, [133, 171]
CONVOLUTIONAL CODE WITH CIRCLE LENGTH 48.

REFERENCES

- [1] L.R. Bahl, J. Cocke, F. Jelinek, and J. Raviv, Optimal decoding of linear codes for minimizing symbol error rate, *IEEE Trans. Inform. Theory*, **20**(2), March 1974, pp. 284-287.
- [2] J.B. Anderson and S.M. Hladik, Tail-biting MAP Decoders, *IEEE Journal in Selected Areas in Communication*, **16**(2), February 1998.
- [3] A.R. Calderbank, G.D. Forney, Jr., and A. Vardy, Minimal Tail-Biting Trellises: The Golay Code and More, *IEEE Trans. Inform. Theory*, **45**(5), July 1999, pp. 1435-1455.
- [4] R. Koetter and A. Vardy, On the theory of linear trellises, *Information, Coding and Mathematics* (M. Blaum, Editor), Boston:Kluwer, May 2002.
- [5] P. Shankar, A. Dasgupta, K. Deshmukh and B.S. Rajan, On Viewing Block Codes as Finite Automata, *Theoretical Computer Science*, **290**(2003) 1775-1797.
- [6] Yaron Shany and Yair Be'ery, Linear Tail-Biting Trellises, the Square-Root Bound, and Applications for Reed-Muller Codes, *IEEE Trans. Inform. Theory*, **46**(4), July 2000, pp 1514-1523.
- [7] Shu Lin and R.Y. Shao, General Structure and construction of Tail Biting Trellises for Linear Block Codes, in *Proc. 2000 Int. Symp. Inform. Theory*, Sorrento, Italy, pp 117.
- [8] G. Solomon and H.C.A. van Tilborg, A connection between block and convolutional codes, *SIAM J. Appl. Math.*, **37**, October 1979, pp 358-369.
- [9] R. Johansson, K. Sh. Zigangirov, *Fundamentals of convolutional coding*, IEEE Press, New York, 1999